

ILS MUK

The new short bar loader

Universal automatic short bar loading system

- Material Ø from 6 mm to 70 mm
- Bar length min.: 500 mm, max.: 1200 mm / 1600 mm
- Workpiece geometries: round, rectangular, square, hexagon, profile material
- No air connection required
- Easy-to-use operating terminal with graphics display and touchscreen
- Portable hand-held operating box with selectable basic functions
- Compact design, so less space required
- Radial offset allows easy access to the end of machine spindle
- Large storage capacity of up to 9 bars of max. bar diameter
- Nearly maintenance-free
- Easy linking with the turning machine, thanks to the universal IRCO standard interface
- Extremely short reloading times, thanks to the increased rapid feed speed of up to 90 m/min


Optional accessories

- Spindle insert tubes for the optimal guiding of material bars are available in a wide range of designs.
- Material tray with chain feed for profile materials
- BUS interface



Technische Änderungen und Irrtümer vorbehalten.
©2010 Kurt Breuning IRCO Maschinenbau GmbH.

Machine dimensions of the type ILS MUK

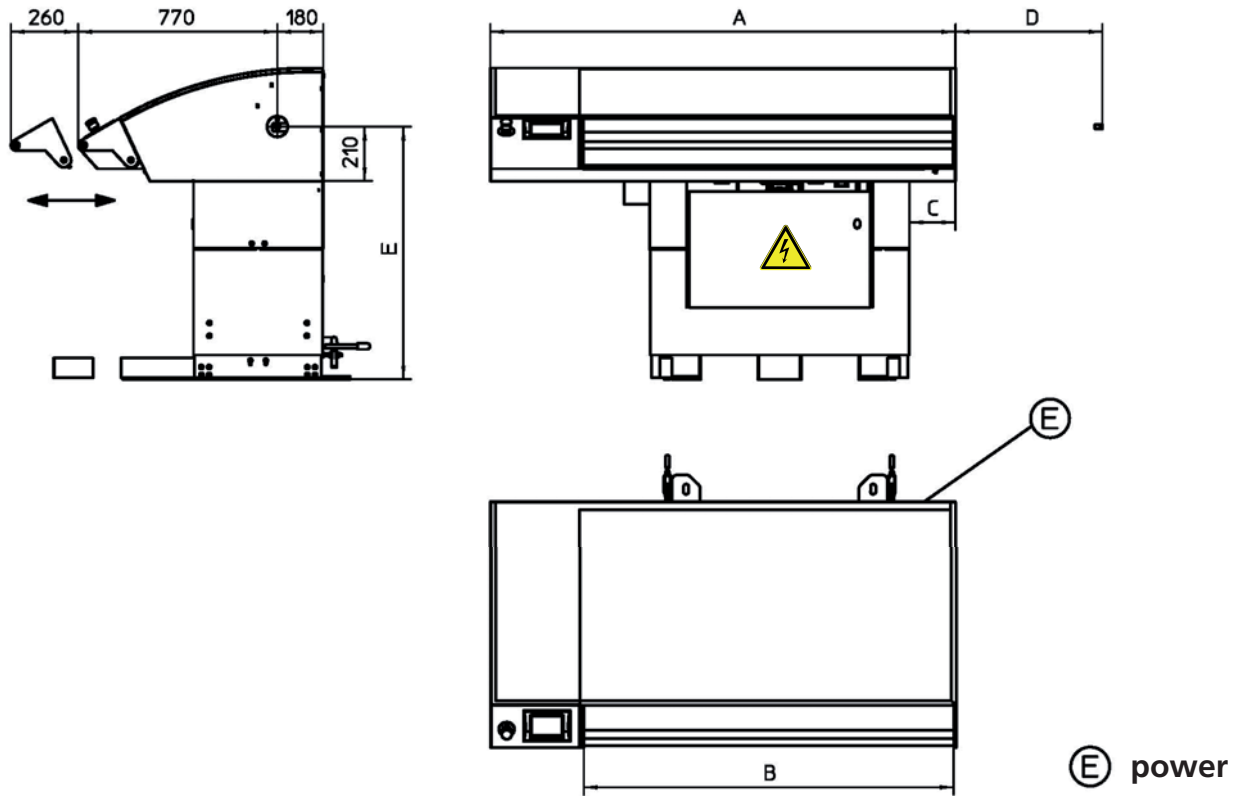

	ILS MUK 7012	ILS MUK 7016
max. bar length	1200	1600
A	1800	2200
B	1250	1650
C	178	178
D (insertion depth pusher)	1470	1870
E (spindle height)	depends on the spindle height of the machine	
weight	520kg	580kg

Dimensional changes and errors excepted

